


TUSIL® BRIGHT PREMIUM

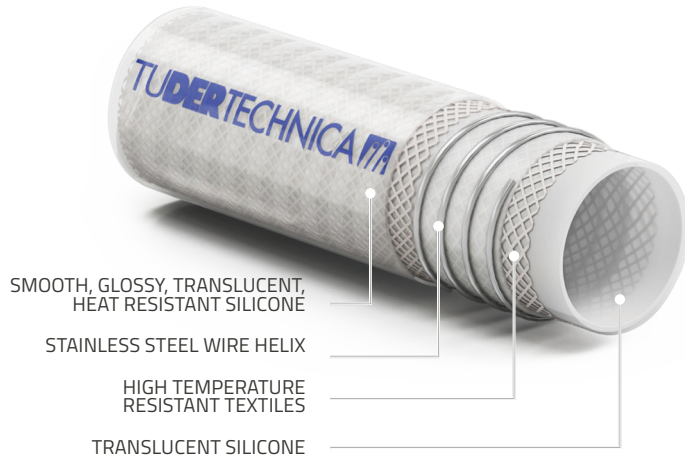

Suction and delivery hose suitable for cosmetic, pharmaceutical and food products. Meets migration test according to BfR Recommendation XV & XXI Cat. 2. Not intended for use as an implant material. Not suitable for blood or human fluids.

DESCRIPTION

Tube

platinum-cured silicone, translucent, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA CFR 21 PART 177.2600, USP XXXVI class VI requirements, European Pharmacopoeia 3.1.9 Ed. VII 2011, ISO 10993 Sections 5,10,11:2009, BfR Recommendation XV & XXI Cat. 2, European Reglement 1935/2004/CE, Japan Ministry of Health and Welfare Notice No.370,1959, No.201,2006 and revision 2012, 3A Sanitary Standard Class II, Arrêté Français 25/11/1992

Reinforcement

high temperature resistant textiles, stainless steel wire helix

Cover

smooth, platinum-cured silicone, translucent, glossy cover. Heat, ageing, ozone and abrasion resistant

Sterilization

refer to guidelines for cleaning and sanitizing on Tudertechnica website

Marking


TUDERTECHNICA TUSIL® BRIGHT PREMIUM

TECHNICAL CHARACTERISTICS

Temperature range : -60°C / +200°C (-76°F / +392°F)

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

Norm : ISO 1307 for dimensional tolerances

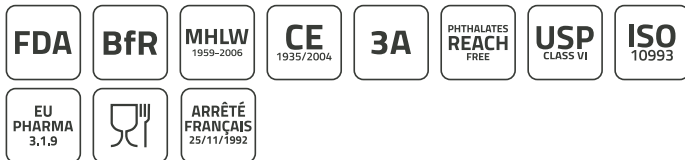

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
13	0,50	24	0,94	0,9	13	15	225	45	675	0,46	0,31	60	2,36
16	0,63	27	1,06	0,9	13	14	210	42	630	0,53	0,36	70	2,76
19	0,75	30	1,18	0,9	13	13	195	39	585	0,60	0,40	80	3,15
25	1,00	36	1,42	0,9	13	10	150	30	450	0,73	0,49	100	3,94
32	1,25	43	1,69	0,9	13	8	120	24	360	0,89	0,60	130	5,12
38	1,50	51	2,00	0,9	13	7	105	21	315	1,21	0,81	155	6,10
51	2,00	64	2,52	0,9	13	6	90	18	270	1,56	1,05	210	8,27

Data refer to ambient temperature (20°C); we recommend a reduction of 20% working pressure for every 100°C of temperature increase.
We reserve the right to supply in random lengths shorter than 40mt or 20mt.