




TUFLUOR® PTFE PHARM

© 2015 THE CHEMOURS COMPANY, CHEMOURS™ AND
TEFLON™ ARE TRADEMARKS OF THE CHEMOURS
COMPANY. TEFLON™ IS USED UNDER LICENSE BY
TUBIGOMMA DEREGIBUS SRL SOCIETÀ UNIPERSONALE

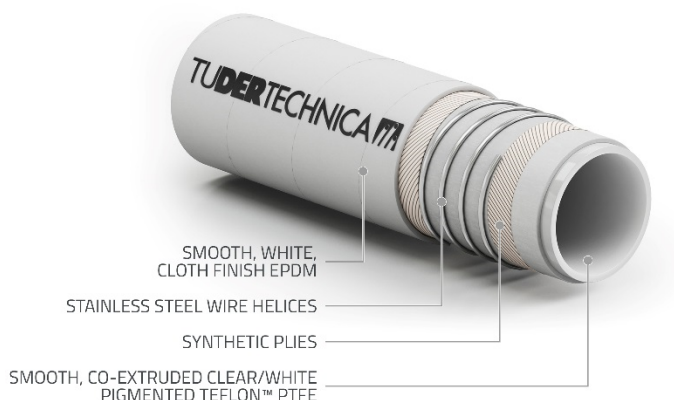

TECHNICAL CHARACTERISTICS

Temperature range : -40°C / +150°C (-40°F / +302°F)

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

Electrical properties : type M according to norm EN 12115
($R < 10^2 \Omega$)

Norm : EN12115



Marking

red/white/blue tape

TUDERTECHNICA TUFLUOR® PTFE PHARM

embossed according to norm EN 12115

TUDERTECHNICA PTFE EN12115:2011 DN SD PN 16 BAR M Q/Y

Suction and delivery hose designed according to EN 12115 standards for food, cosmetic and pharmaceutical products, chemicals and solvents, except for chlorine trifluoride, chlorine and fluorine gas, oxygen difluoride, phosgene and molten alkalis (for ex. sodium). Designed for the chemical industry, foodstuff, pharmaceutical and cosmetic industry, where a flexible connection is required. The hose is produced with high quality elastomers, with excellent chemical and mechanical properties. Not intended for use as an implant material. Not suitable for blood or human fluids.

DESCRIPTION

Tube

TEFLON™ PTFE, co-extruded clear/white pigmented, smooth, phthalates free, tested in compliance with 1907/2006/CE (REACH). TEFLON™ PTFE is a polymer with excellent resistance to high temperature, mechanical stress and to oxidation. It complies with FDA 21 CFR 177.1550 standards, USP XXXVI class VI, ISO 10993 Sections 5,10,11:2009, EUROPEAN REGLEMENT 1935/2004/CE AND 10/2011/CE, 3A Sanitary Standard Class II

Reinforcement

synthetic plies, stainless steel wire helices, a/s copper wires to discharge static electricity

Cover

smooth, EPDM, white, abrasion, ageing and ozone resistant, cloth finish

Sterilization

refer to guidelines for cleaning and sanitizing on Tudertechnica website

Inside diameter		Outside diameter		Vacuum		Length		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[m]	[ft]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
13	0,50	25	1,00	0,9	13	40	130	16	250	64	1000	0,54	0,36	90	3,54
19	0,75	31	1,22	0,9	13	40	130	16	250	64	1000	0,70	0,47	130	5,12
25	1,00	37	1,46	0,9	13	40	130	16	250	64	1000	0,86	0,58	170	6,69
32	1,25	44	1,73	0,9	13	40	130	16	250	64	1000	1,18	0,79	215	8,46
38	1,50	51	2,00	0,9	13	40	130	16	250	64	1000	1,43	0,96	255	10,04
50	1,97	66	2,60	0,9	13	40	130	16	250	64	1000	2,08	1,39	330	12,99
63,5	2,50	79,5	3,13	0,9	13	20	65	16	250	64	1000	2,96	1,98	430	16,93
75	2,95	91	3,58	0,9	13	20	65	16	250	64	1000	3,43	2,30	510	20,08
100	3,94	116	4,57	0,9	13	20	65	12	185	48	750	4,60	3,08	675	26,57

Data refer to ambient temperature (20 °C).