


TUSIL® BRIGHT PREMIUM D

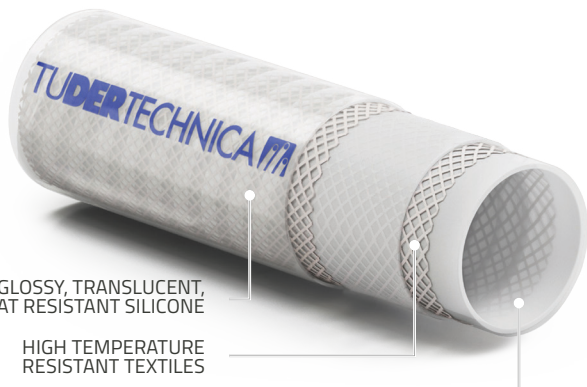

SMOOTH, GLOSSY, TRANSLUCENT,
HEAT RESISTANT SILICONE

HIGH TEMPERATURE
RESISTANT TEXTILES


TRANSLUCENT SILICONE

TECHNICAL CHARACTERISTICS

Temperature range : -60°C / +200°C (-76°F / +392 °F)

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

Norm : ISO 1307 for dimensional tolerances

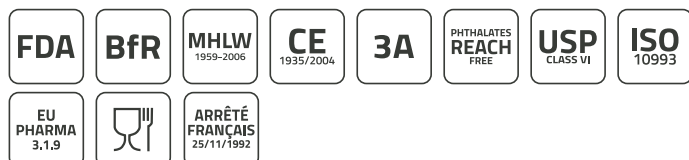

Delivery hose suitable for cosmetic, pharmaceutical and food products. Meets migration test according to BfR Recommendation XV & XXI Cat. 2. Not intended for use as an implant material. Not suitable for blood or human fluids.

DESCRIPTION

Tube

platinum-cured silicone, translucent, phthalates free, tested in compliance with 1907/2006/CE (REACH). Meets FDA CFR 21 PART 177.2600, USP XXXVI class VI requirements, European Pharmacopoeia 3.1.9 Ed. VII 2011, ISO 10993 Sections 5,10,11:2009, BfR Recommendation XV & XXI Cat. 2, European Reglement 1935/2004/CE, Japan Ministry of Health and Welfare Notice No.370, 1959, No.201,2006 and revision 2012, 3A Sanitary Standard Class II, Arrêté Français 25/11/1992

Reinforcement

high temperature resistant textiles

Cover

smooth, platinum-cured silicone, translucent, glossy cover. Heat, ageing, ozone and abrasion resistant

Sterilization

refer to guidelines for cleaning and sanitizing on Tudertechnica website

Marking

TUDERTECHNICA TUSIL® BRIGHT PREMIUM

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
10	0,39	22	0,87	-	-	16	250	48	750	0,35	0,23	-	-
13	0,50	25	1,00	-	-	15	225	45	675	0,41	0,27	-	-
16	0,63	28	1,10	-	-	14	210	42	630	0,48	0,32	-	-
19	0,75	31	1,22	-	-	13	195	39	585	0,55	0,37	-	-
25	1,00	37	1,46	-	-	10	150	30	450	0,68	0,46	-	-
32	1,25	44	1,73	-	-	8	120	24	360	0,83	0,56	-	-
38	1,50	50	1,97	-	-	7	105	21	315	0,96	0,64	-	-
51	2,00	63	2,48	-	-	6	90	18	270	1,24	0,83	-	-

Data refer to ambient temperature (20°C); we recommend a reduction of 20% working pressure for every 100°C of temperature increase.
We reserve the right to supply in random lengths shorter than 40mt or 20mt.