


## TUWAGON MASTER

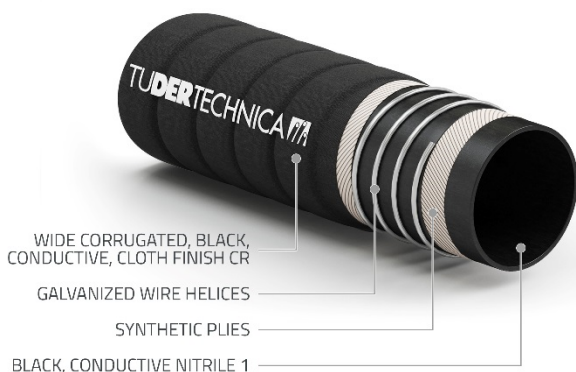

### TECHNICAL CHARACTERISTICS

**Temperature range :** -30°C / +100°C ( -22°F / +212°F)

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed and the length of time the fluid is in contact with the hose.

**Electrical properties :** type Ω/T according to norm EN 12115 (R<10<sup>6</sup> Ω, R<10<sup>9</sup> Ω through the hose wall)

**Norm :** EN12115 - TRbF 131/2

Suction and delivery hose designed according to EN 12115 standards for oil and petrol, aromatic content up to 50%. Tested and certified hose by INERIS for use in Atex area (Ex-Zone).

### DESCRIPTION

#### Tube

NBR 1, black, conductive

#### Reinforcement

synthetic plies, galvanized wire helices, a/s copper wire to discharge static electricity

#### Cover

wide corrugated, CR, black, conductive, abrasion, ageing, ozone and oil resistant, cloth finish

#### Marking

yellow tape

TUDERTECHNICA TUWAGON MASTER

embossed according to norm EN 12115

TUDERTECHNICA NBR1 EN12115:2011 DN SD PN 10 BAR Ω/T Q/Y

Ex

Inside diameter		Outside diameter		Vacuum		Working pressure		Burst pressure		Appr. weight		Bending radius	
[mm]	[in]	[mm]	[in]	[bar]	[psi]	[bar]	[psi]	[bar]	[psi]	[kg/mt]	[lbs/ft]	[mm]	[in]
32	1,25	44	1,73	0,9	13	10	150	40	600	1,18	0,79	100	3,94
38	1,50	51	2,00	0,9	13	10	150	40	600	1,39	0,93	125	4,92
50	1,97	66	2,60	0,9	13	10	150	40	600	2,10	1,41	180	7,09
51	2,00	67	2,64	0,9	13	10	150	40	600	2,13	1,43	180	7,09
63,5	2,50	79,5	3,13	0,9	13	10	150	40	600	2,71	1,82	230	9,06
75	2,95	91	3,58	0,9	13	10	150	40	600	3,18	2,13	280	11,02
76	3,00	92	3,62	0,9	13	10	150	40	600	3,22	2,16	280	11,02
100	3,94	116	4,57	0,9	13	10	150	40	600	4,41	2,95	400	15,75
102	4,00	118	4,65	0,9	13	10	150	40	600	4,46	2,99	400	15,75

Data refer to ambient temperature (20°C).